

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : B32B 27/16</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 00/47405</b> (43) International Publication Date: 17 August 2000 (17.08.00)</p>
<p>(21) International Application Number: PCT/SE00/00262 (22) International Filing Date: 10 February 2000 (10.02.00) (30) Priority Data: 9900528-2 15 February 1999 (15.02.99) SE (71) Applicant (for all designated States except US): SANDVIK AKTIEBOLAG [SE/SE]; S-811 81 Sandviken (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): WIMAN, Jörgen [SE/SE]; Kurrasbacken 11, S-811 52 Sandviken (SE). (74) Agent: TÅQUIST, Lennart; Sandvik Aktiebolag, Patent De- partment, S-811 81 Sandviken (SE).</p>		<p>(81) Designated States: CN, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Swedish).</i></p>
<p>(54) Title: CUTTING INSERT FOR TURNING</p> <div data-bbox="487 1218 1136 1722"></div> <p>(57) Abstract</p> <p>The present invention relates to an indexable insert (10) for turning having polygonal, preferably triangular basic shape including an upper surface (11), a bottom surface (12) and these interconnecting edge surfaces (13, 14, 15), at least a part of the intersecting lines between the edge surfaces and the upper surface forming at least a main cutting edge (19), a secondary cutting edge (18) and a curved corner region therebetween which is asymmetric and divided into a plurality of circular segments. The novelty of the invention is that the size of the radius of a radial edge (20) next to the secondary cutting edge shall be at least 5 times larger than the corner edge (21) located on the opposite side of the bisector and which provides a transition to the main cutting edge (19).</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Cutting insert for turning

The present invention relates to an indexable insert for turning which cutting insert has a polygonal basic form including an upper surface, and a bottom surface interconnected  
5 by side surfaces, wherein at least a part of the intersection lines between the side surfaces and the upper surface forms at least one main cutting edge, a secondary cutting edge and a curved corner cutting edge therebetween.

For copy turning nowadays, to a large extent, indexable inserts are used with nose point  
10 angles below  $60^\circ$ , wherein an ordinary value on the nose point angles is  $55^\circ$ , which enables application of the cutting inserts within a broad range. On the market nowadays a number of different types of indexable inserts with  $55^\circ$  nose point angle are found, among which types rhomboidic, rhombic and regular triangular indexable inserts can be mentioned.

15

In copy turning the following properties regarding feature and economy are desirable:

- 1) Good chip control, i.e. favourable chip guidance and chip breaking.
- 2) No movement of the cutting insert under impact of cutting forces.

20

When copy turning inwards in certain materials or in slender work pieces and also in usage on unsteady machines and in internal metal working, low cutting forces and preferably a positive chip angle on the copying insert are also desirable. Simultaneously there is a demand in modern machines that the copy turning insert to be used will be  
25 able to give the best possible surface finish of the machined surface. Sometimes surface finish can be improved by using higher cutting speed and neutral or positive rake angles.

It is a first purpose of the invention to achieve a new and improved indexable insert for  
30 copy turning having a new type of wiper edge in the corner region which enables attainment of improved surface finish of the machined surface.

It is a second purpose to achieve an insert with a rake face in the corner area that brings about a favourable influence on the cutting force and the tool wear.

It is a third purpose to achieve an insert that is modified such that it enables increased  
5 feed whilst maintaining good surface finish.

The invention will be described in more detail in the following with reference to the enclosed drawings, wherefrom the features of the invention will become apparent.

- 10 Fig. 1 is a plan view of a portion of an indexable insert according to the invention.  
Fig. 2 is a side view of the cutting insert in Fig. 1.  
Fig. 3 is an enlarged detailed view of the corner of an insert according to Figs. 1-2.  
Fig. 4 is a view showing a tool with the cutting insert of Figs. 1-3 during copy turning inwards of a work piece.
- 15 Fig. 5 shows a sectional view along the line V-V in Fig. 1 and  
Fig. 6 is a sectional view along the line VI-VI in Fig. 1.

Figs. 1-3 show a cutting insert 10 for copying turning according to the invention with triangular basic form. The cutting insert is generally made of cemented carbide but can  
20 also be made of other ceramic materials. The insert comprises flat top and bottom surfaces 11 and 12, which are mutually parallel and which form a right angle with the edge surfaces which are designated 13, 14 and 15 and interconnected by curved corner portions. In the embodiment shown in Figs. 1-3 the edge surfaces are oriented in a plane perpendicular to the plane that includes flat surfaces 11 and 12. The insert additionally  
25 includes a plurality of cutting edges 18, 19 which, provide intersections between the edge surfaces 13, 14, 15 and the top surface 11. The insert can alternatively have positive basic shape wherein the edge surfaces intersect with the top surface at an acute angle. The insert has a central hole 16 for the receipt of a pin or a centre screw (not shown) for the clamping of the insert into a belonging tool holder 17 (Fig. 4).

30

In Fig. 1 the edge surfaces extending towards an acute angled corner are designated 13 and 14, with the embodiment shown in Fig. 1 the edge 18 represents a secondary cutting

edge and the edge 19 represents a main cutting edge between which then is an asymmetric curved corner region including a radial edge 20 on one side of the bisector B intended to serve as a wiper edge and on opposite side of said bisector there is a corner edge 21 adjacent to the main cutting edge 19. It is to be understood that the insert  
5 must have such inclination that a clearance angle is obtained at the main cutting edge and at the secondary cutting edges 18, 19 and at the corner region therebetween. This will enable the edge portion 20 to be used as an edge for inwards copying such that when facing at for example 90° a large cut can be taken while the length of the edges 18 need not be specifically great. The insert is at all cutting edge portions provided with a  
10 land 22 which extends all around the insert whilst oriented substantially perpendicular towards the edge surface 13, 14, 15.

According to the invention the radial edge 20 is provided with a size of radius that is at least five times larger than the size valid for the corner edge 21 located on the opposite  
15 side of said bisector B, said corner edge being a transition to the main cutting edge 19. A further characteristic feature is that the main cutting edge 19 extends in a longitudinal direction such that it includes an angle of 80-135° together with radial edge 20.

The transition between the primary radial edge 20 and the corner edge 21 is in the form  
20 of a secondary radial edge 23, the size of which ought to be less than the radial edge 24 that represents a transition between the primary radial edge 20 and the secondary cutting edge 18. The relation should preferably be such that the size of radius of radial edge 23 is about half the size of radial edge 24 located next to the secondary edge 18. At same time a transition radial edge 25 ought to be provided between the corner edge 21 and the  
25 main cutting edge 19, the radius of which ought to be of same size as the size of the radius of radial edge 24 located next to the secondary edge 18. As regards the width of the land 22 along radial edge 20 and along the remainder of the insert it has been found suitable to select the width of said land 22 along radial edge 20 such that it amounts to 50-70 % of the width of the land 22 along the corner cutting edge 21.

30

A sloping surface or downwards inclined surface 26 extends from the inner limiting edge of each land 22 and extends into a secondary sloping surface 27 which is located at

the corner area. This secondary sloping surface 27 extends into a planar central floor surface 28 of triangular basic shape whilst plane parallel with the bottom face 12 of the insert. The angle of inclination  $\alpha$  of said sloping surface 26 ought to be in the area 10-30° whereas the angle of inclination of the secondary sloping surface 27 ought to be 0-15°.

Each land 22 is planar and includes a raised land area, which in a direction away from the corner area extends into an inclined land area. A characteristic feature of the invention is that said land area 22 includes an area 22' with smaller width along the radial edge 20 which then successively appears with larger width which is uniform both along the corner cutting edge 21 as well as along the entire main cutting edge 19. At the same time as this brings about a purposeful enforcement of the cutting edge this simultaneously enables reducing the contact between the chips and the insert's surface such that the crater wear effect can be timely deferred.

In order to furthermore improve chipbreaking and deflecting the chip obtained during turning and copying a chip former is provided in the corner region. This chipformer is provided in the shape of an inclined plateau 27 that is depressed in relation to the edge portions, the confining side surfaces of which converge towards the corner with an asymmetric configuration in relation to the bisector. More specifically the shape is such that an essentially sine-formed side edge 29 located on same side of the bisector B as the primary radial edge 20 gets a termination in the form of an inclined primary edge 30 which extends parallel with radial edge 20 and then provides an obtuse angled corner 31 and then extends into a secondary edge 32 in opposite direction whereby said bisector B intersects said latter edge approximately in the middle thereof. The last mentioned secondary edge 32 provides in its turn an obtuse angled corner 33 together with the forward termination of another mainly sine-formed side edge 34 which represents a side confining edge of the plateau 27.

Thanks to the above defined radial differentiation in the corner region of the insert a surprisingly good surface smoothness of the machined surface has been achieved in comparison with a similar insert of constant corner radius, and the insert has

Claims

1. An indexable cutting insert for turning having generally polygonal shape, including an upper surface (11) and a bottom surface (12) and these interconnecting edge surfaces (13, 14, 15) at least apart of the intersecting lines between the edge surfaces and the upper surface forming at least a main cutting edge (19), a secondary cutting edge (18) and a curved corner region therebetween which is asymmetric and divided into a plurality of circular segments which at the intersection line with the upper surface form edge portions wherein immediately adjacent ones of the circular segments being of mutually different radii, characterized in, that
- a) the secondary cutting edge (18) extends adjacent to a radial edge (20) which is located on same side of the bisector as the main cutting edge and appears with a radius of curvature, the size of said radius being at least 5 times larger than the corner edge (21) located on opposite side of the bisector and which provides a transition to the main cutting edge (19) and that
- b) the main cutting edge (19) mainly extends in a longitudinal direction such that it includes an angle of 80-135° together with the radial edge (20).
2. Indexable insert according to claim 1, characterized in, that the transition surface between the cutting edges (17, 18) and the top surface (11) is in the shape of a land (22) intended to reinforce the edge portions with varying width along the corner region.
3. Indexable insert according to claim 1 or 2, characterized in, that the portion of the land (22) in the corner region has such shape that the width of the land portion (22') along the secondary cutting edge (20) on one side of the bisector (B) is smaller than the width of the land (22) along the curved corner cutting edge (21) located on opposite side of the bisector (B).

additionally been found less sensible to how the setting angle is provided compared with a corresponding insert with a straight wiper edge. Due to the above optimized shape of the chipformer in combination with the shape of said land 22 it has simultaneously been possible to increase the feed with 20-100 % whilst maintaining the profile depth of the generated surface.

In Fig. 4 it is shown how the illustrated embodiment of the insert is used for copying inwards with the insert clamped into a belonging toolholder 17 whereby the direction of machining is designated P on the workpiece A.

10

In order to achieve optimized chip control the radii of the various radial edges should lie in the following intervals:

- 20: 5-30 mm, preferably 10-20 mm
- 15 21: 0.2-3.2 mm, preferably 0.4-1.6 mm
- 23: 0.2-1.6 mm, preferably 0.4-1.2 mm
- 24: 0.6-2.4 mm, preferably 0.8-1.6 mm
- 25: 1.6-30 mm, preferably 5-20 mm



4. Indexable insert according to any of the claims 1-3, characterized in, that the width of the edge reinforcing land (22) is the same along the curved corner cutting edge (21) as well as along the straight secondary cutting edge (18).
- 5 5. Indexable insert according to any of the claims 1-4, characterized in, that the width of the land (22) along the secondary cutting edge (20) constitutes 50-70 % of the width of the land along the corner cutting edge (21).
- 10 6. Indexable insert according to any of the claims 1-5, characterized in, that the insert has basic triangular form.
7. Indexable insert according to any of the claims 1-6, characterized in, that the insert in the corner region at a certain distance from the land (22) appears with a planar inclined surface (27) that is depressed in relation to the edges whilst being
- 15 confined by sine-formed side confining edges (29, 34) which converge outwards towards the cutting corner.
8. Indexable insert according to claim 7, characterized in, that the sine-formed side limiting edge (29) on one side of the bisector (B) extends into a mainly
- 20 straight primary edge (30) which entirely is located on one side of the bisector (B) parallel with the extension of the radial edge (20).
9. Indexable insert according to claims 7 or 8, characterized in, that the straight edge (30) extends via an obtuse angled corner (31) into another straight edge
- 25 (32) which is intersected by the bisector (B).
10. Indexable insert according to claim 9, characterized in, that the bisector (B) is intersecting the straight secondary edge (32) mainly in the middle thereof.
- 30 11. Indexable insert according to any of claims 1-10, characterized in, that the sloping surface (26) inside the land (22) represents a first sloping surface which in the corner region inwardly appears next to a second sloping surface (27) wherein said

last surface slopes at a smaller angle than the first one whereby said second sloping surface (27) appears next to a planar mainly triangularly shaped flat floor surface (28).

12. Indexable insert according to claim 11, characterized in, that the sloping  
5 angle ( $\alpha$ ) is 10-30° and that the sloping angle ( $\beta$ ) is 0-15°.

1/2

Fig. 1

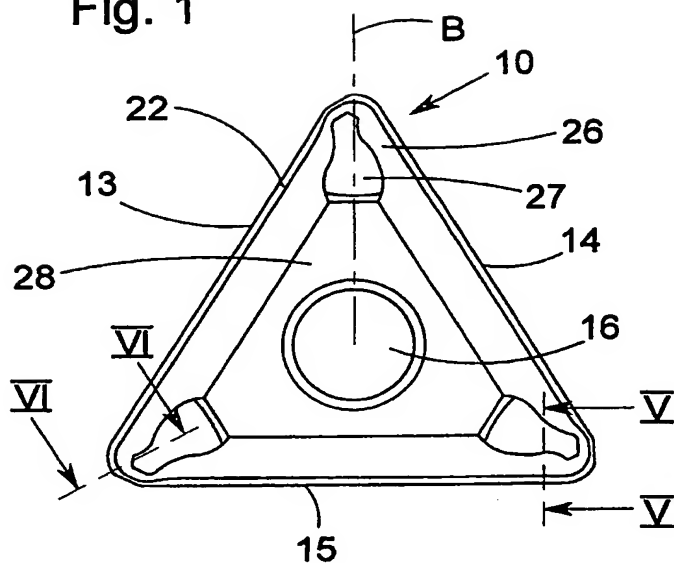


Fig. 2


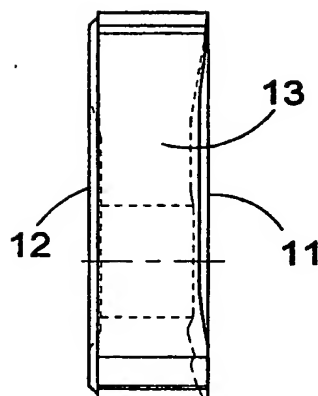


Fig. 3

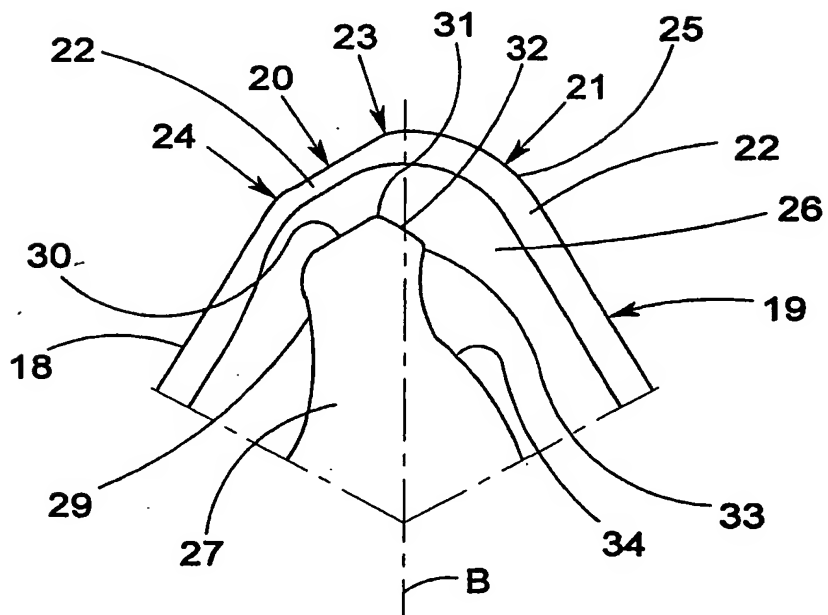

2/2

Fig. 4

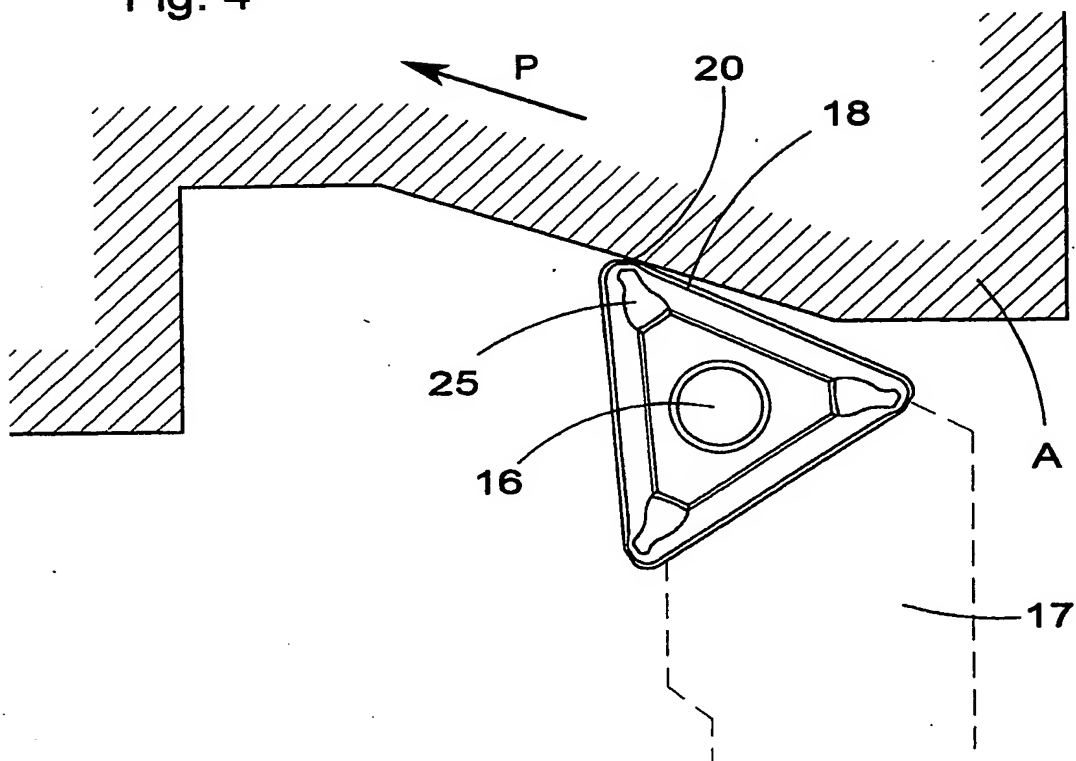


Fig. 5


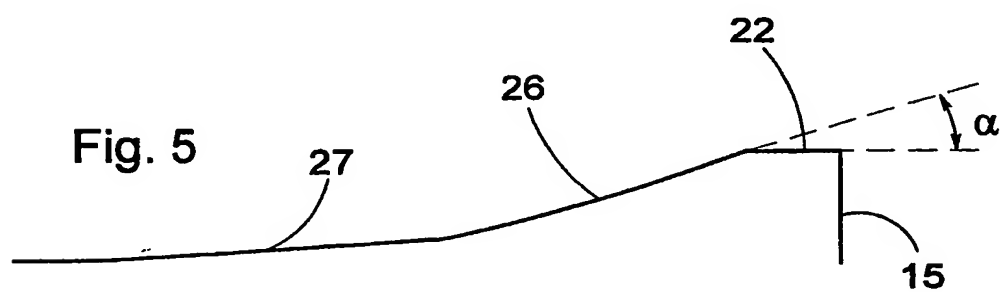


Fig. 6

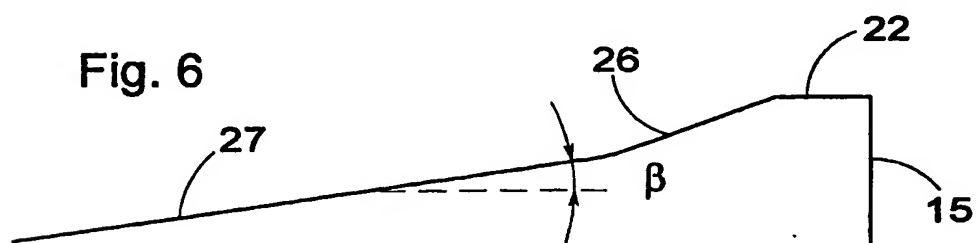

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 00/00262

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B32B 27/16  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B23B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Derwent's abstract, No 94- 5458/01, week 9401, ABSTRACT OF SU, 1782196 (KOMPLEKS RES PRODN ASSOC), 15 December 1992 (15.12.92)	1
Y	--	2,6,11-12
X	WO 9500272 A1 (KENNAMETAL INC.), 5 January 1995 (05.01.95), figure 4, abstract	1
Y	--	2,6,11-12
Y	SE 509306 C2 (SANDVIK AB), 11 January 1999 (11.01.99), figure 1, abstract	2,6
	--	

☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"I." document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or (other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  29 May 2000	Date of mailing of the international search report  09-06-2000
Name and mailing address of the ISA Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer  Joakim Movander/OGU Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00262

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5116167 A (NIEBAUER), 26 May 1992 (26.05.92), figure 2, abstract --	2
Y	Derwent's abstract, No 94-157408/19, week 9419, ABSTRACT OF SU, 1798045 (REFRACTOREIS RES INST), 28 February 1993 (28.02.93) -- -----	11,12

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/12/99

International application No.  
PCT/SE 00/00262

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9500272 A1	05/01/95	AT 150349 T	15/04/97
		AU 669809 B	20/06/96
		AU 6783494 A	17/01/95
		CA 2162598 A,C	05/01/95
		DE 706433 T	24/10/96
		DE 69402200 D,T	18/09/97
		EP 0706433 A,B	17/04/96
		SE 0706433 T3	
		ES 2085840 T	16/06/96
		JP 8507976 T	27/08/96
		ZA 9403346 A	16/01/95
SE 509306 C2	11/01/99	AU 8894498 A	22/03/99
		EP 0955117 A	10/11/99
		SE 9801501 A	11/01/99
US 5116167 A	26/05/92	AT 143621 T	15/10/96
		AU 645885 B	27/01/94
		AU 1199592 A	15/09/92
		CA 2092405 A,C	20/08/92
		DE 69214274 D,T	06/03/97
		EP 0572448 A,B	08/12/93
		SE 0572448 T3	
		ES 2093251 T	16/12/96
		JP 2754285 B	20/05/98
		KR 9600555 B	09/01/96
		MX 9200595 A	01/08/92
		WO 9214570 A	03/09/92